



Wind Turbine

FREEN-H20

The Freen-H20 is a 20 kW Class II horizontal-axis small wind turbine. Designed for medium and major energy consumers, solar plants, communities. Provides high energy output with competitive cost per kWh.



your wind  your power  your way



High Return on Investment

Competitive pricing combined with excellent annual energy production (AEP) ensures a cost-effective solution.



Quiet & Efficient

Operates at a low rotation speed, minimizing noise and ensuring a smooth energy supply.



Low Maintenance & Easy Servicing

Requires only a simple service check every two years, reducing operational costs.




Advanced Safety Features

Equipped with a fail-safe tip brake and a spring-applied electromagnetic rotor brake for reliable operation.

The Freen-H20 is built for durability and efficiency, making it an excellent choice for those looking to invest in sustainable, long-term wind energy.

Freen OÜ

 Arenduse tn 6, Kohtla-Järve,
30328 Ida-Viru maakond,
Estonia

 contact@freen.com

 +372 5374 1754

FREEN-H20


Technical Specifications

Rated power, (kW)	20
Cut-out wind speed, (m/s)	no cut-out
Cut-in wind speed, (m/s)	3,5
Wind class	IEC II
Swept area, (m ²)	177
Blades	3, fixed angle, upwind
Rotor diameter, (m)	15
Tower	Lattice, 12-36 m
Generator	Asynchronous, planetary gearbox
Brakes	Stall, electro mechanic failsafe rotor brake, tip-brakes
Grid connection	Direct with reactive power compensation
Standard	IEC 61400-2:2013 - Small wind turbines
Operating temperatures, (C°)	-25 to +60
Remote monitoring	Optional
Lifetime, (years)	20

20 kW Wind Turbine

freen

Power Output

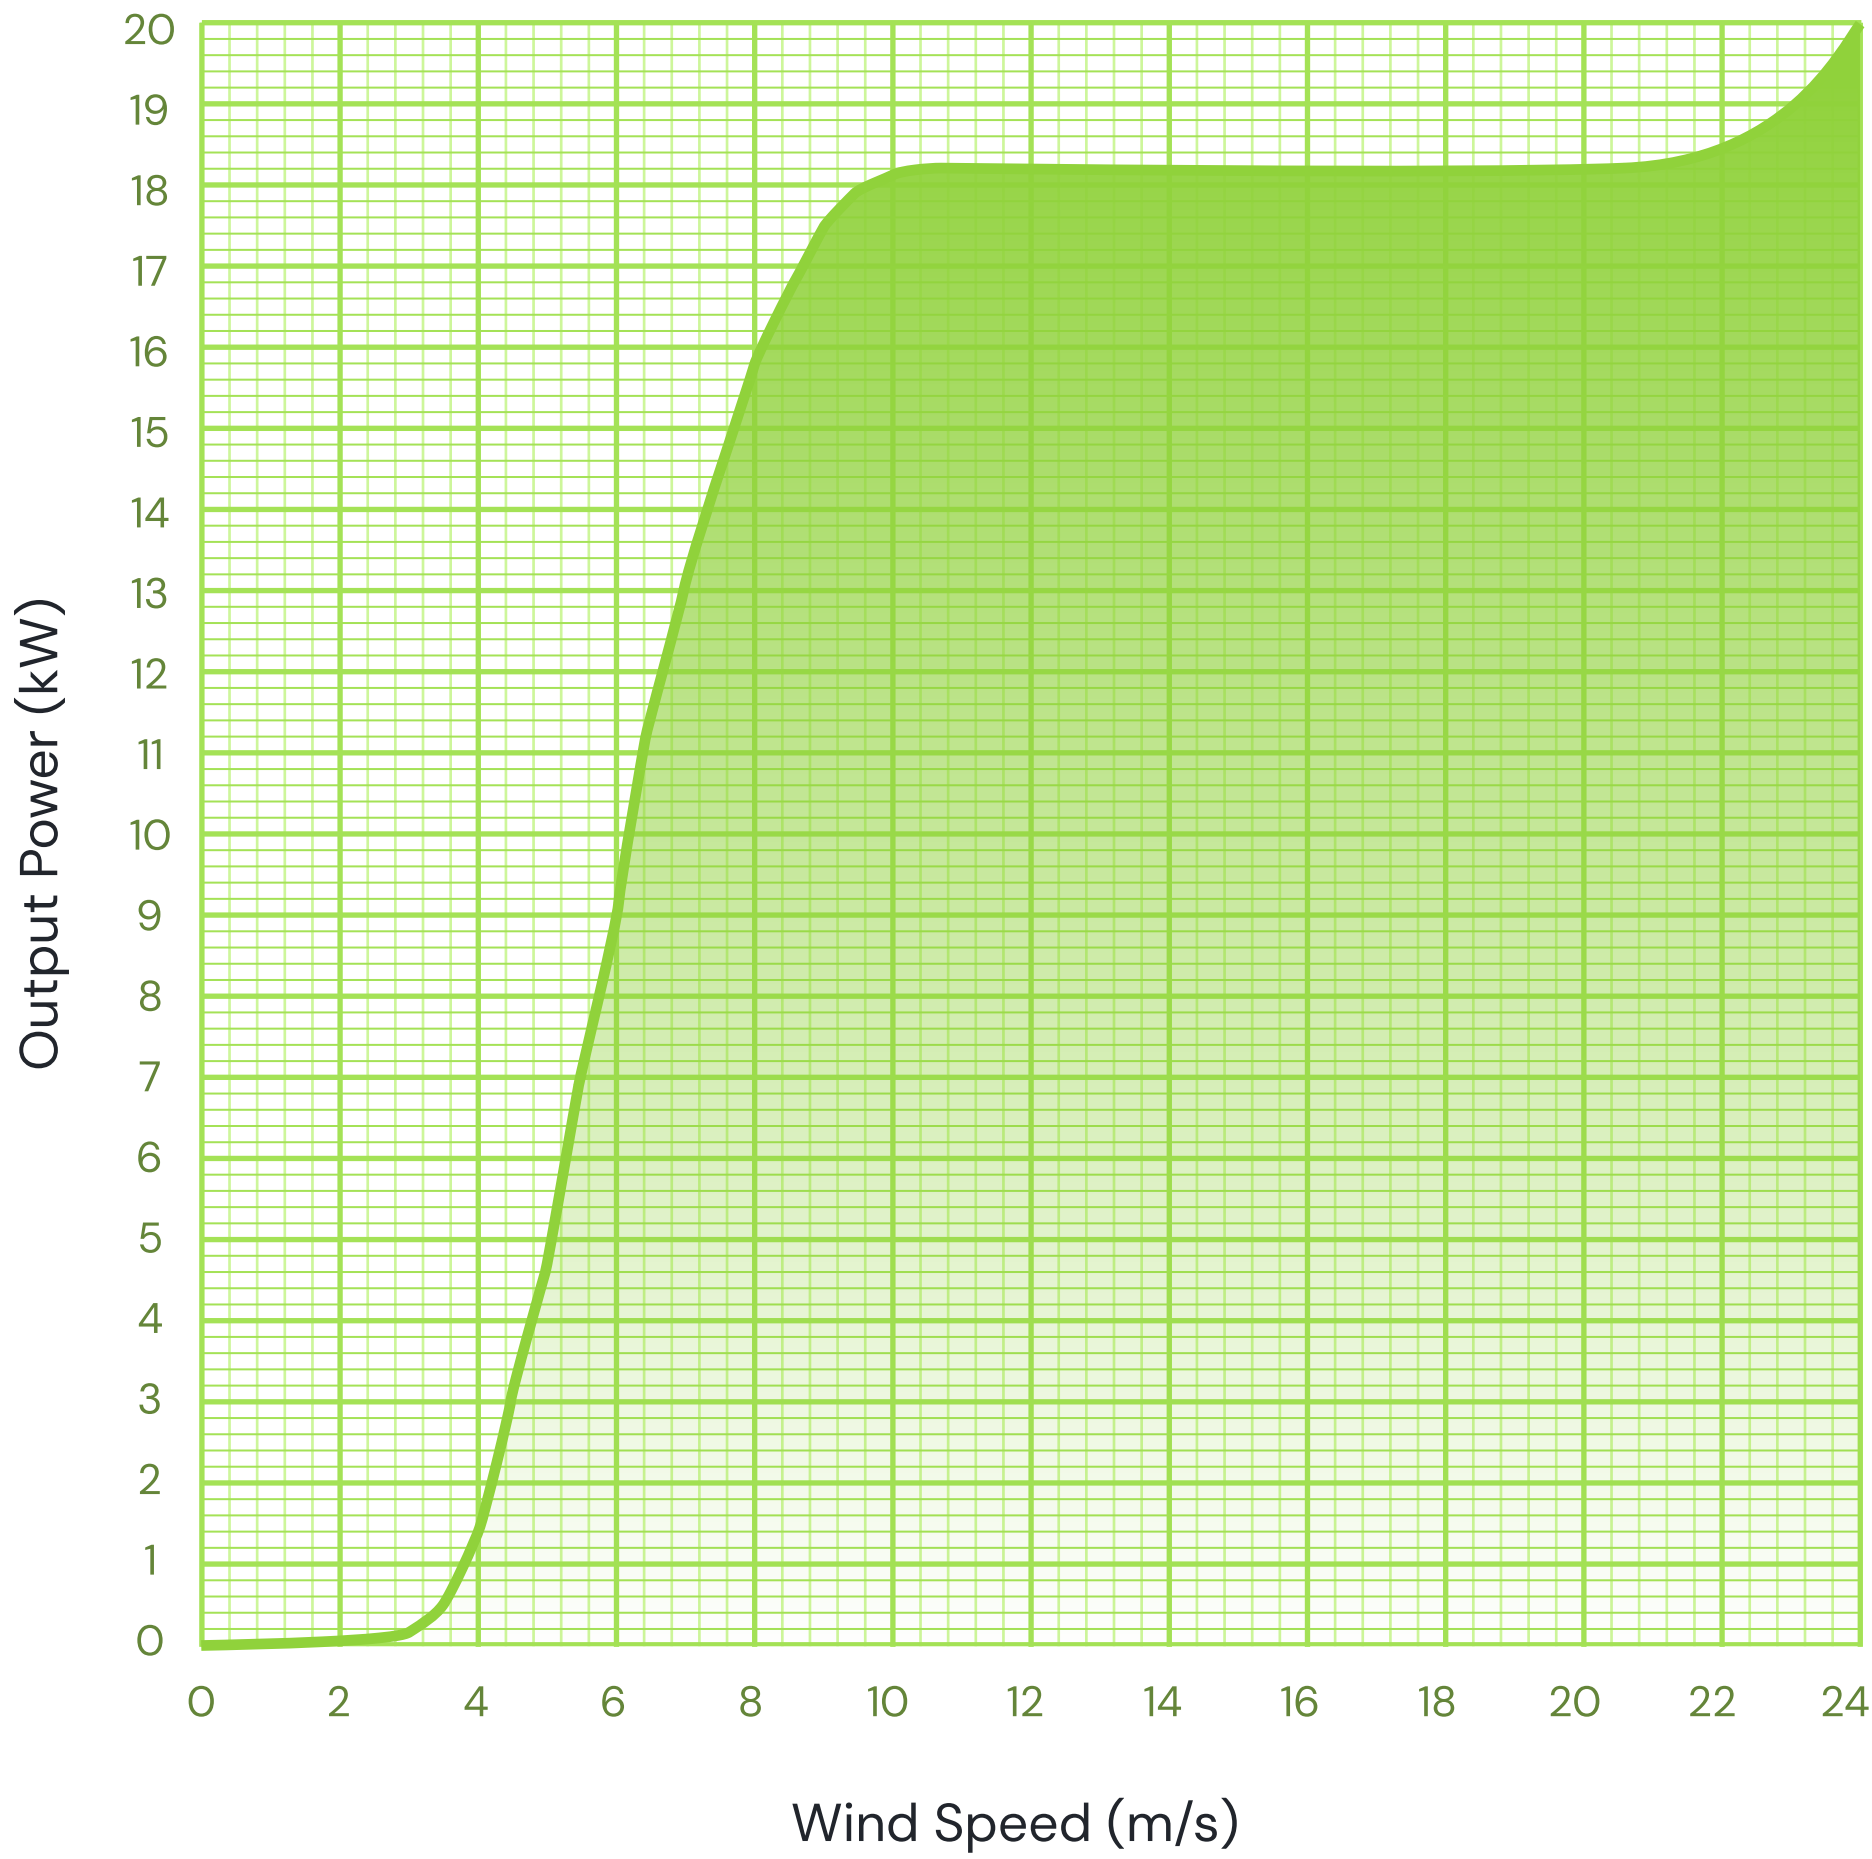


Annual Energy Production (AEP)

Wind speed (m/s)	AEP (kWh)	Wind speed (m/s)	AEP (kWh)
3.5	22800	7.0	88500
4.0	33200	7.5	95000
4.5	43900	8.0	100700
5.0	54300	8.5	105700
5.5	64100	9.0	110100
6.0	73100	9.5	113800
6.5	81200	10	116900

! AEP is based on a Rayleigh wind speed distribution, K=2, t=15°C, P=1013 mbar, ρ=1.225 kg/m³

Drawings

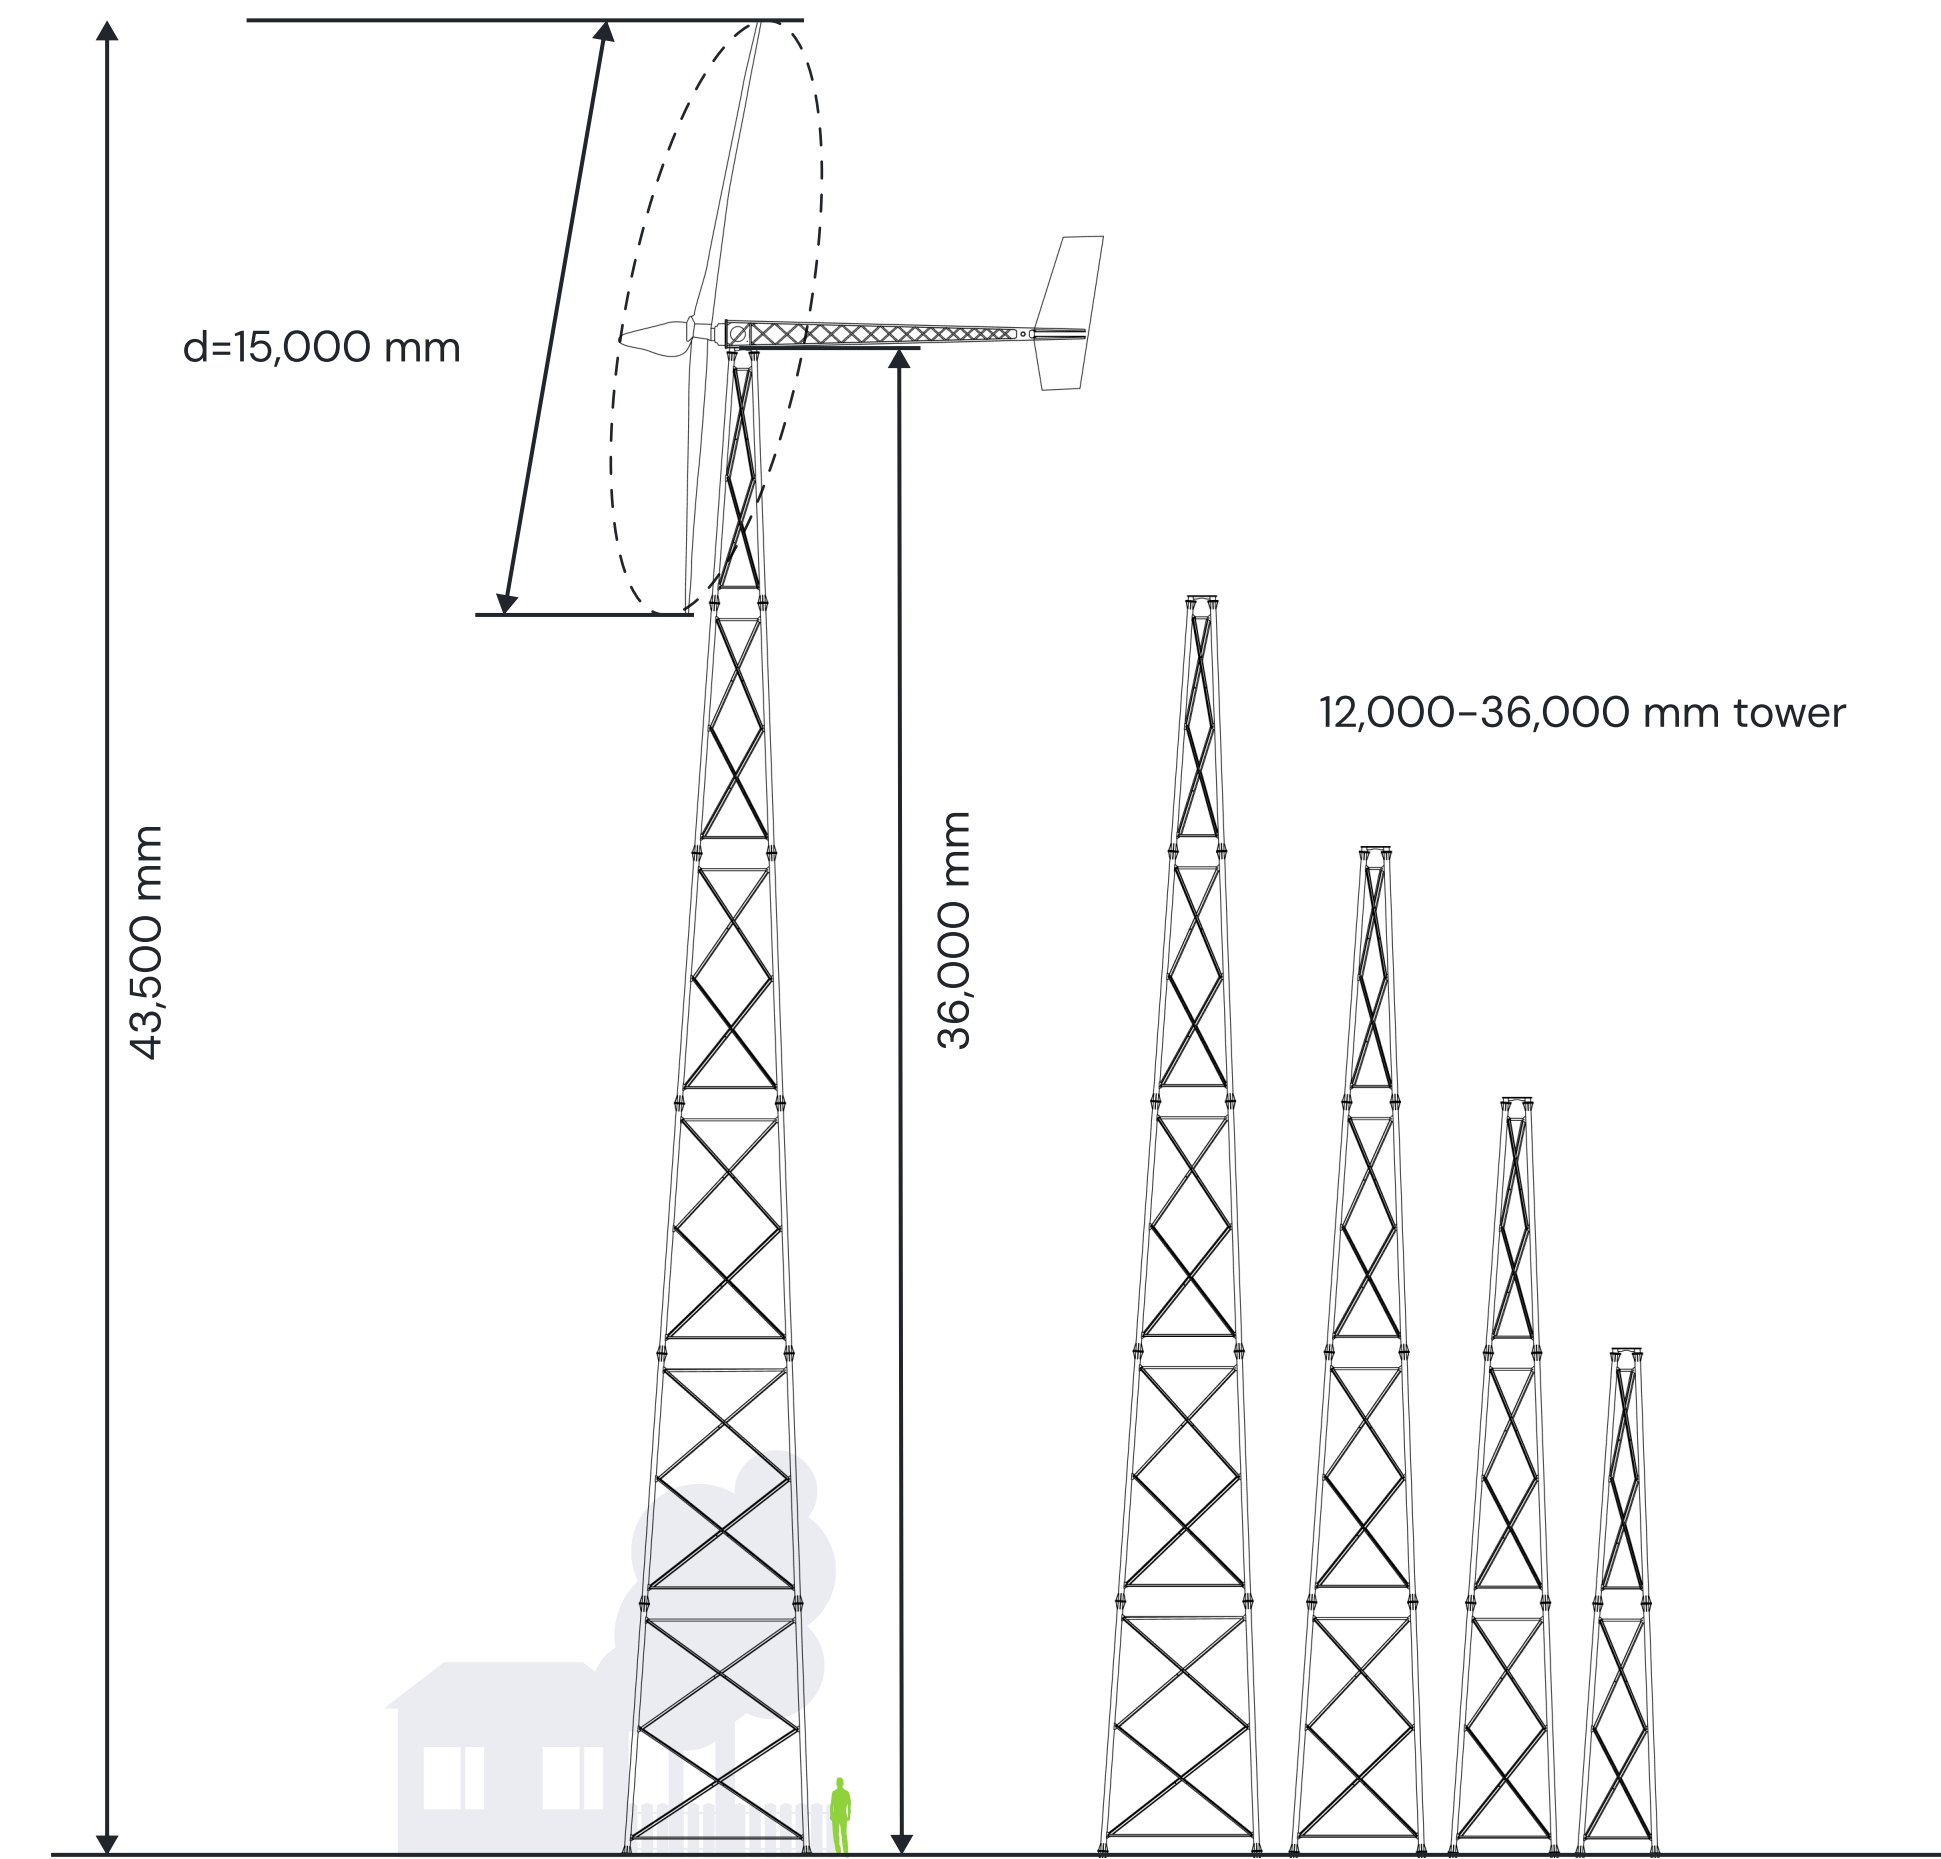

Turbine description

The main parts of the wind turbine are foundation, tower and nacelle with rotor and tail, electric panels and cables necessary for energy transfer and turbine control. Wind turbine has free yaw with tail. The turbine rotation speed is constant.

For safe operation blade tip-brakes will activate with rotor over speed and mechanical rotor brake is used to stop the rotor. All these methods allow for safe operation and control of the turbine. Simple maintenance of greasing the bearings and visual inspection yearly. Simple gearbox oil change every two years.

Contact Us



! The product specifications are provisional and subject to change at any time due to improvements or other reasons.