



Energy Storage

FREEN-BLH

High voltage LiFePO battery systems.

The FREEN-BLH series delivers high-voltage rechargeable energy storage built with advanced LiFePO₄ cells for maximum efficiency, long cycle life, and powerful system integration. Designed for commercial, industrial, and utility-scale applications, this series ensures seamless operation with high-voltage inverters and fast response systems, where power and precision matter most.



your wind  your power  your way



Scalable and Modular

Connect high-voltage modules in parallel to build energy systems from 15 kWh for powerful, compact storage.



Flexible Energy Capacity

A modular design that scales to your needs, delivering the right amount of usable energy for any storage application.



Reliable All-Weather Performance

Tested for extremes, with an operating range from -40°C to +60°C, ideal for installations in challenging industrial and off-grid conditions.



Manufacturer-Direct Customization

Freen offers direct customization at the factory level, ensuring each system meets your unique voltage, capacity, and operating environment needs.



Built for Long-Term Use

Engineered for >10 000 charge cycles, the BLH series is designed to perform for up to 20 years in daily-use, high-load environments.



Smart Monitoring and Integration

Equipped with CAN communication, the system integrates seamlessly with commercial energy management platforms and inverter systems.

Designed for residential, agricultural, and commercial use, high-voltage modules (614 V) can be connected in parallel or series, scaling up to 90 kWh and beyond.


Custom Configuration Example

freen

FREEN-BLH-150HV (parallel modules connection)

BATTERY MODULE	FREEN-BLH
Cell type	LiFePO4
Module quantity	10
Rated capacity	250 Ah
Nominal energy	150 kWh
Usable energy	150 kWh
Nominal voltage	614 V
Operating voltage	485–690 V
Max. charging current	125 A
Max. discharging current	125 A
Rated charge / discharge power	75 kW
Max.charging power	75 kW
Dimensions, mm (W / D / H)	952 × 2080 × 745
Battery module weight	1230 kg

Drawings

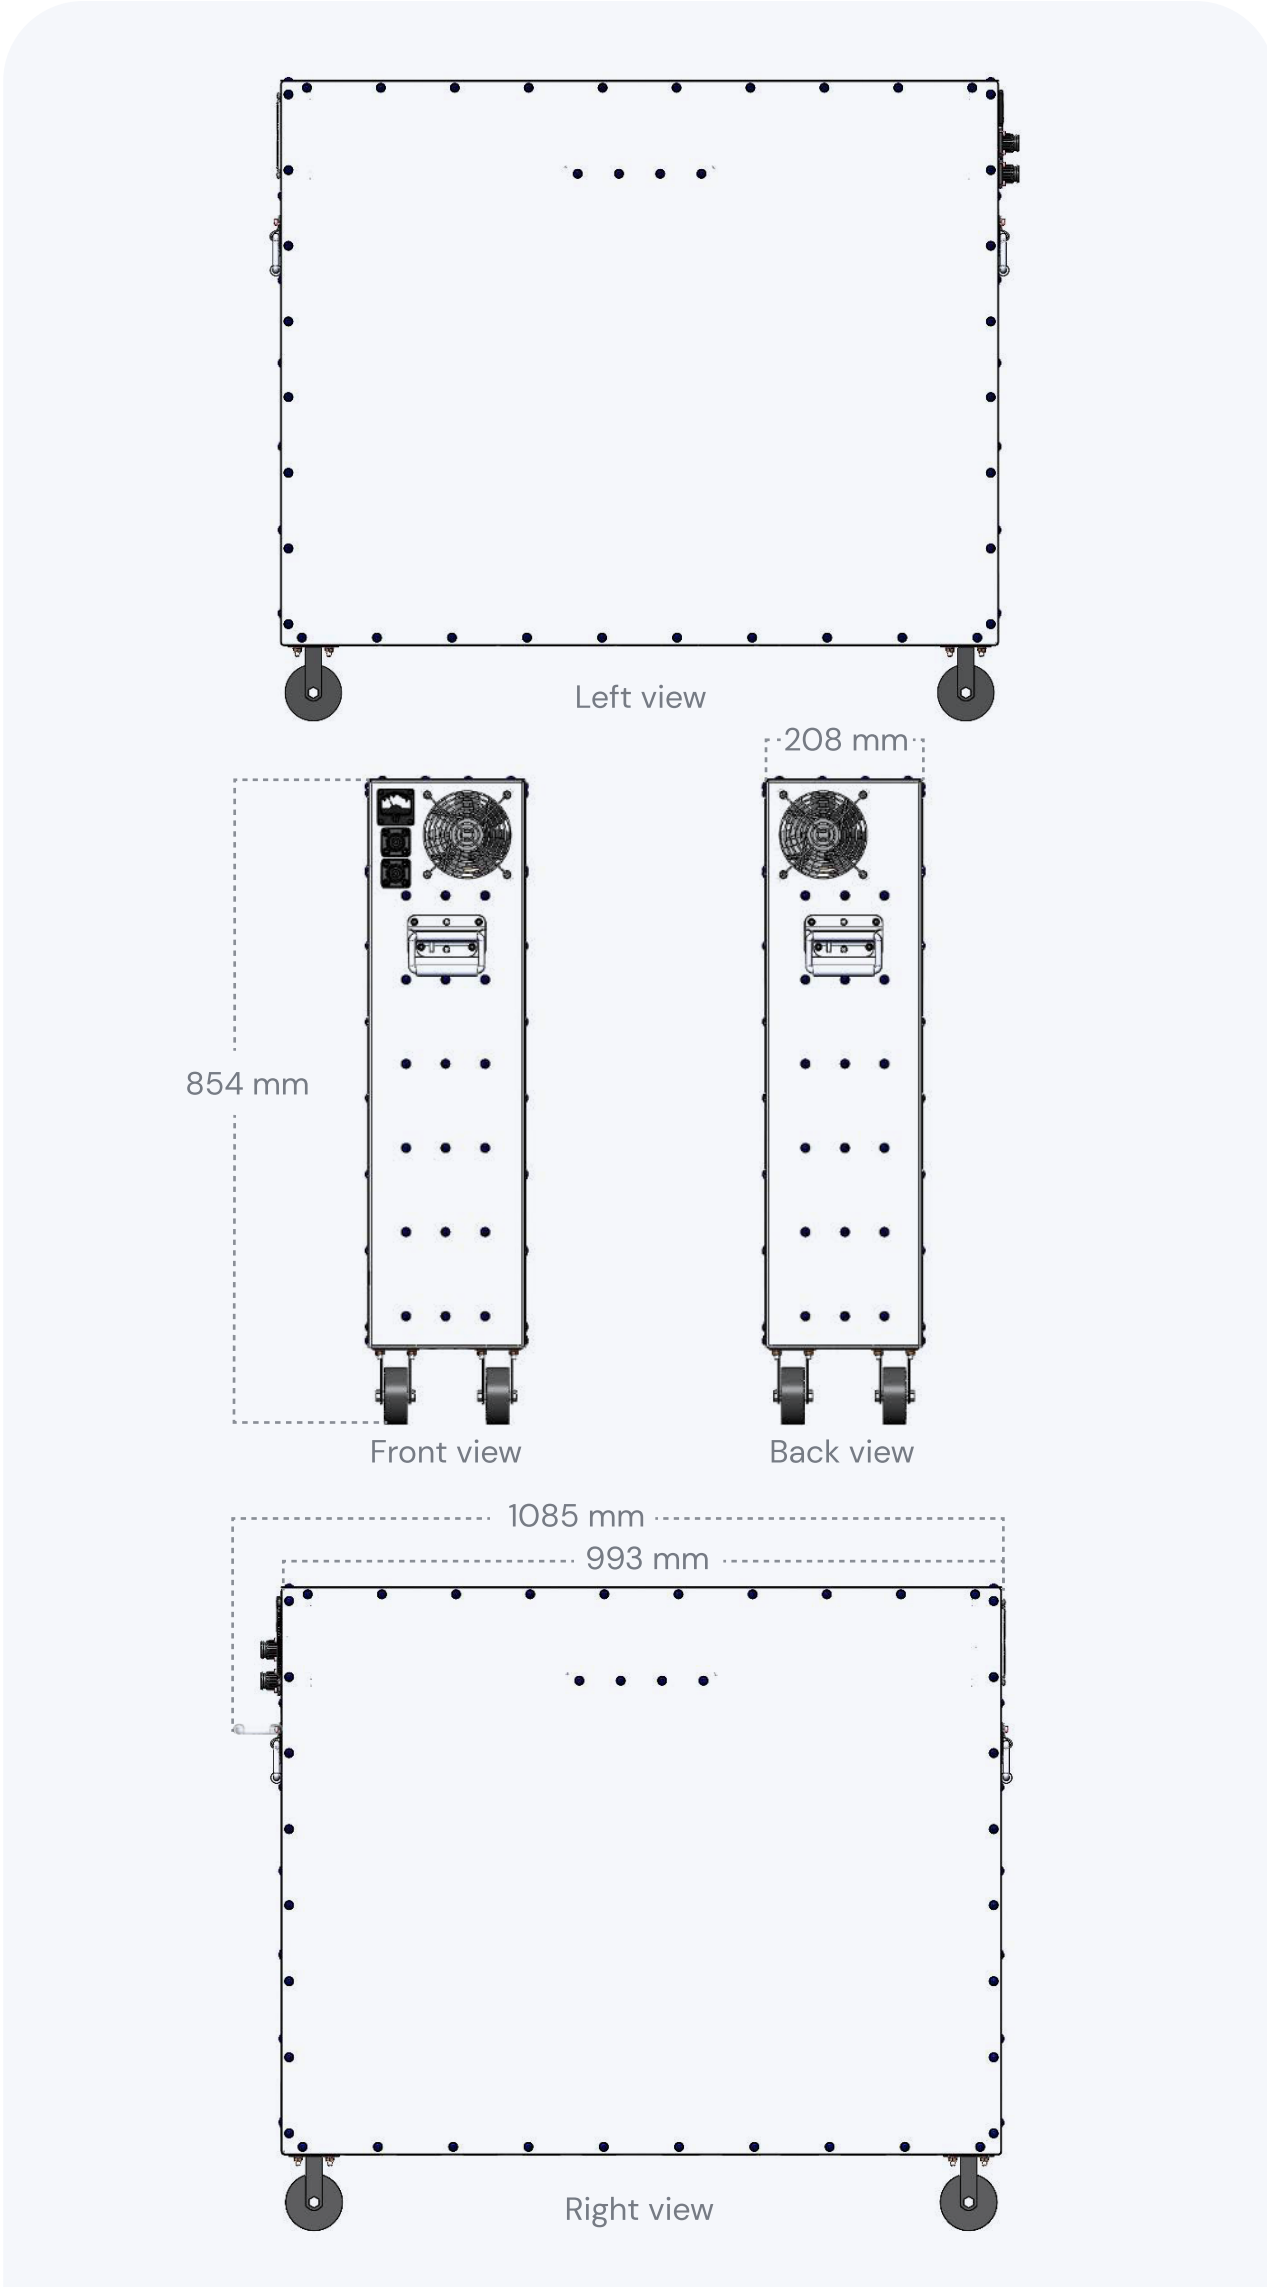

Engineered Safety

Freen-BLH batteries are engineered with safety and reliability at their core.


To minimize the risk of internal short circuits, overheating, or fire, we apply a strategy of partial capacity utilization, keeping the battery consistently undercharged and under discharged. This approach greatly reduces the likelihood of thermal runaway, even during high-voltage and high-load operations. Each module is structurally reinforced to withstand mechanical stress and prevent the ingress of moisture or oxygen, which could trigger exothermic reactions.

The result: a stable, safe, and resilient high-voltage energy storage system built for long-term performance.

Contact Us



Freem OÜ

 Arenduse tn 6, Kohtla-Järve, 30328 Ida-Viru maakond, Estonia

 contact@freen.com

 +372 5374 1754



FREEN-BLH Specifications



BATTERY MODULE	FREEN-BLH-15HV	FREEN-BLH-30HV	FREEN-BLH-45HV	FREEN-BLH-60HV	FREEN-BLH-75HV	FREEN-BLH-90HV
Cell type	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4
Module quantity	1	2	3	4	5	6
Rated capacity	25 Ah	50 Ah	75 Ah	100 Ah	125 Ah	150 Ah
Nominal energy	15 kWh	30 kWh	45 kWh	60 kWh	75 kWh	90 kWh
Usable energy	15 kWh	30 kWh	45 kWh	60 kWh	75 kWh	90 kWh
Nominal voltage	614 V	614 V	614 V	614 V	614 V	614 V
Operating voltage	485-690 V	485-690 V	485-690 V	485-690 V	485-690 V	485-690 V
Max. charging current	12.5 A	25 A	37.5 A	50 A	62.5 A	75 A
Max. discharging current	12.5 A	25 A	37.5 A	50 A	62.5 A	75 A
Rated charge / discharge power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Max.charging power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Max.discharging power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Dimensions, mm (W / D / H)	952 × 208 × 745	2 x 952×208×745	3 x 952×208×745	4 x 952×208×745	5 x 952×208×745	6 x 952×208×745
Battery module weight	123 kg	246 kg	369 kg	492 kg	615 kg	738 kg
Mounting method	Floor moutend	Floor moutend	Floor moutend	Floor moutend	Floor moutend	Floor moutend
Installation location	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Storage temperature range	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°
Operating temperature range	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°
Degree of protection	IP65	IP65	IP65	IP65	IP65	IP65
Cooling concept	built-in fan	built-in fan	built-in fan	built-in fan	built-in fan	built-in fan
Communication	CAN	CAN	CAN	CAN	CAN	CAN
Relative humidity	<70%	<70%	<70%	<70%	<70%	<70%
Round-trip efficiency	>97%	>97%	>97%	>97%	>97%	>97%
Life cycle	>10 000 times	>10 000times	>10 000 times	>10 000 times	>10 000 times	>10 000 times

* parallel modules connection



Energy Storage

FREEN-BLL



Low voltage LiFePO₄ battery systems.

The FREEN-BLL series is a versatile low-voltage rechargeable energy storage solution built with advanced LiFePO₄ cells for exceptional safety, long life, and high efficiency. Freen lithium batteries offer flexible configurations and seamless compatibility with leading low-voltage inverter systems.



your wind  your power  your way



Scalable and Modular

Easily build systems from 15 kWh using stackable low-voltage battery modules.



High Usable Energy Output

Deliver up to 90 kWh of usable energy per system, engineered for maximum efficiency and compatibility.



Reliable All-Weather Performance

Designed to operate from -40°C to +60°C, the system performs reliably in both extreme cold and high heat.



Manufacturer-Direct Customization

Get tailor-made configurations directly from Freen, optimized for your specific voltage, capacity, or climate needs.



Built for Long-Term Use

With over 10 0000 charge cycles, the system is designed for even 20 years of operation under standard daily-use conditions.



Smart Monitoring and Integration

Equipped with Bluetooth communication for easy monitoring and seamless integration with leading low-voltage inverters.performance monitoring.

Designed for residential, agricultural, and commercial use, these low-voltage modules (51.2V) can be connected in parallel or series, scaling up to 90 kWh and beyond.

FREEN-BLL Specifications



BATTERY MODULE	FREEN-BLL-15LV	FREEN-BLL-30LV	FREEN-BLL-45LV	FREEN-BLL-60LV	FREEN-BLL-75LV	FREEN-BLL-90LV
Cell type	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4	LiFePO4
Module quantity	1	2	3	4	5	6
Rated capacity	300 Ah	600 Ah	900 Ah	1200 Ah	1500 Ah	1800 Ah
Nominal energy	15 kWh	30 kWh	45 kWh	60 kWh	75 kWh	90 kWh
Usable energy	15 kWh	30 kWh	45 kWh	60 kWh	75 kWh	90 kWh
Nominal voltage	51.2 V	51.2 V	51.2 V	51.2 V	51.2 V	51.2 V
Operating voltage	49-53 V	49-53 V	49-53 V	49-53 V	49-53 V	49-53 V
Max. charging current	150 A	300 A	450 A	600 A	750 A	900 A
Max. discharging current	150 A	300 A	450 A	600 A	750 A	900 A
Rated charge / discharge power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Max.charging power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Max.discharging power	7.5 kW	15 kW	22.5 kW	30 kW	37.5 kW	45 kW
Dimensions, mm (W / D / H)	952 × 208 × 745	2 x 952×208×745	3 x 952×208×745	4 x 952×208×745	5 x 952×208×745	6 x 952×208×745
Battery module weight	123 kg	246 kg	369 kg	492 kg	615 kg	738 kg
Mounting method	Floor moutend	Floor moutend	Floor moutend	Floor moutend	Floor moutend	Floor moutend
Installation location	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Storage temperature range	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°	-10 – +35 C°
Operating temperature range	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°	Charge -10 – +55 C° Discharge -40 – +60 C°
Degree of protection	IP65	IP65	IP65	IP65	IP65	IP65
Cooling concept	built-in fan	built-in fan	built-in fan	built-in fan	built-in fan	built-in fan
Communication	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth	Bluetooth
Relative humidity	<70%	<70%	<70%	<70%	<70%	<70%
Round-trip efficiency	>97%	>97%	>97%	>97%	>97%	>97%
Life cycle	>10 000 times	>10 000 times	>10 000 times	>10 000 times	>10 000 times	>10 000 times

* parallel modules connection


Custom Configuration Example

freen

FREEN-BLL-90HV (series modules connection)

BATTERY MODULE	FREEN-BLL
Cell type	LiFePO4
Module quantity	6
Rated capacity	300 Ah
Nominal energy	90 kWh
Usable energy	90 kWh
Nominal voltage	307.2 V
Operating voltage	294-318 V
Max. charging current	150 A
Max. discharging current	150 A
Rated charge / discharge power	45 kW
Max.charging power	45 kW
Max.discharging power	45 kW
Dimensions, mm (W / D / H)	952 × 1248 × 745
Battery module weight	738 kg

Drawings

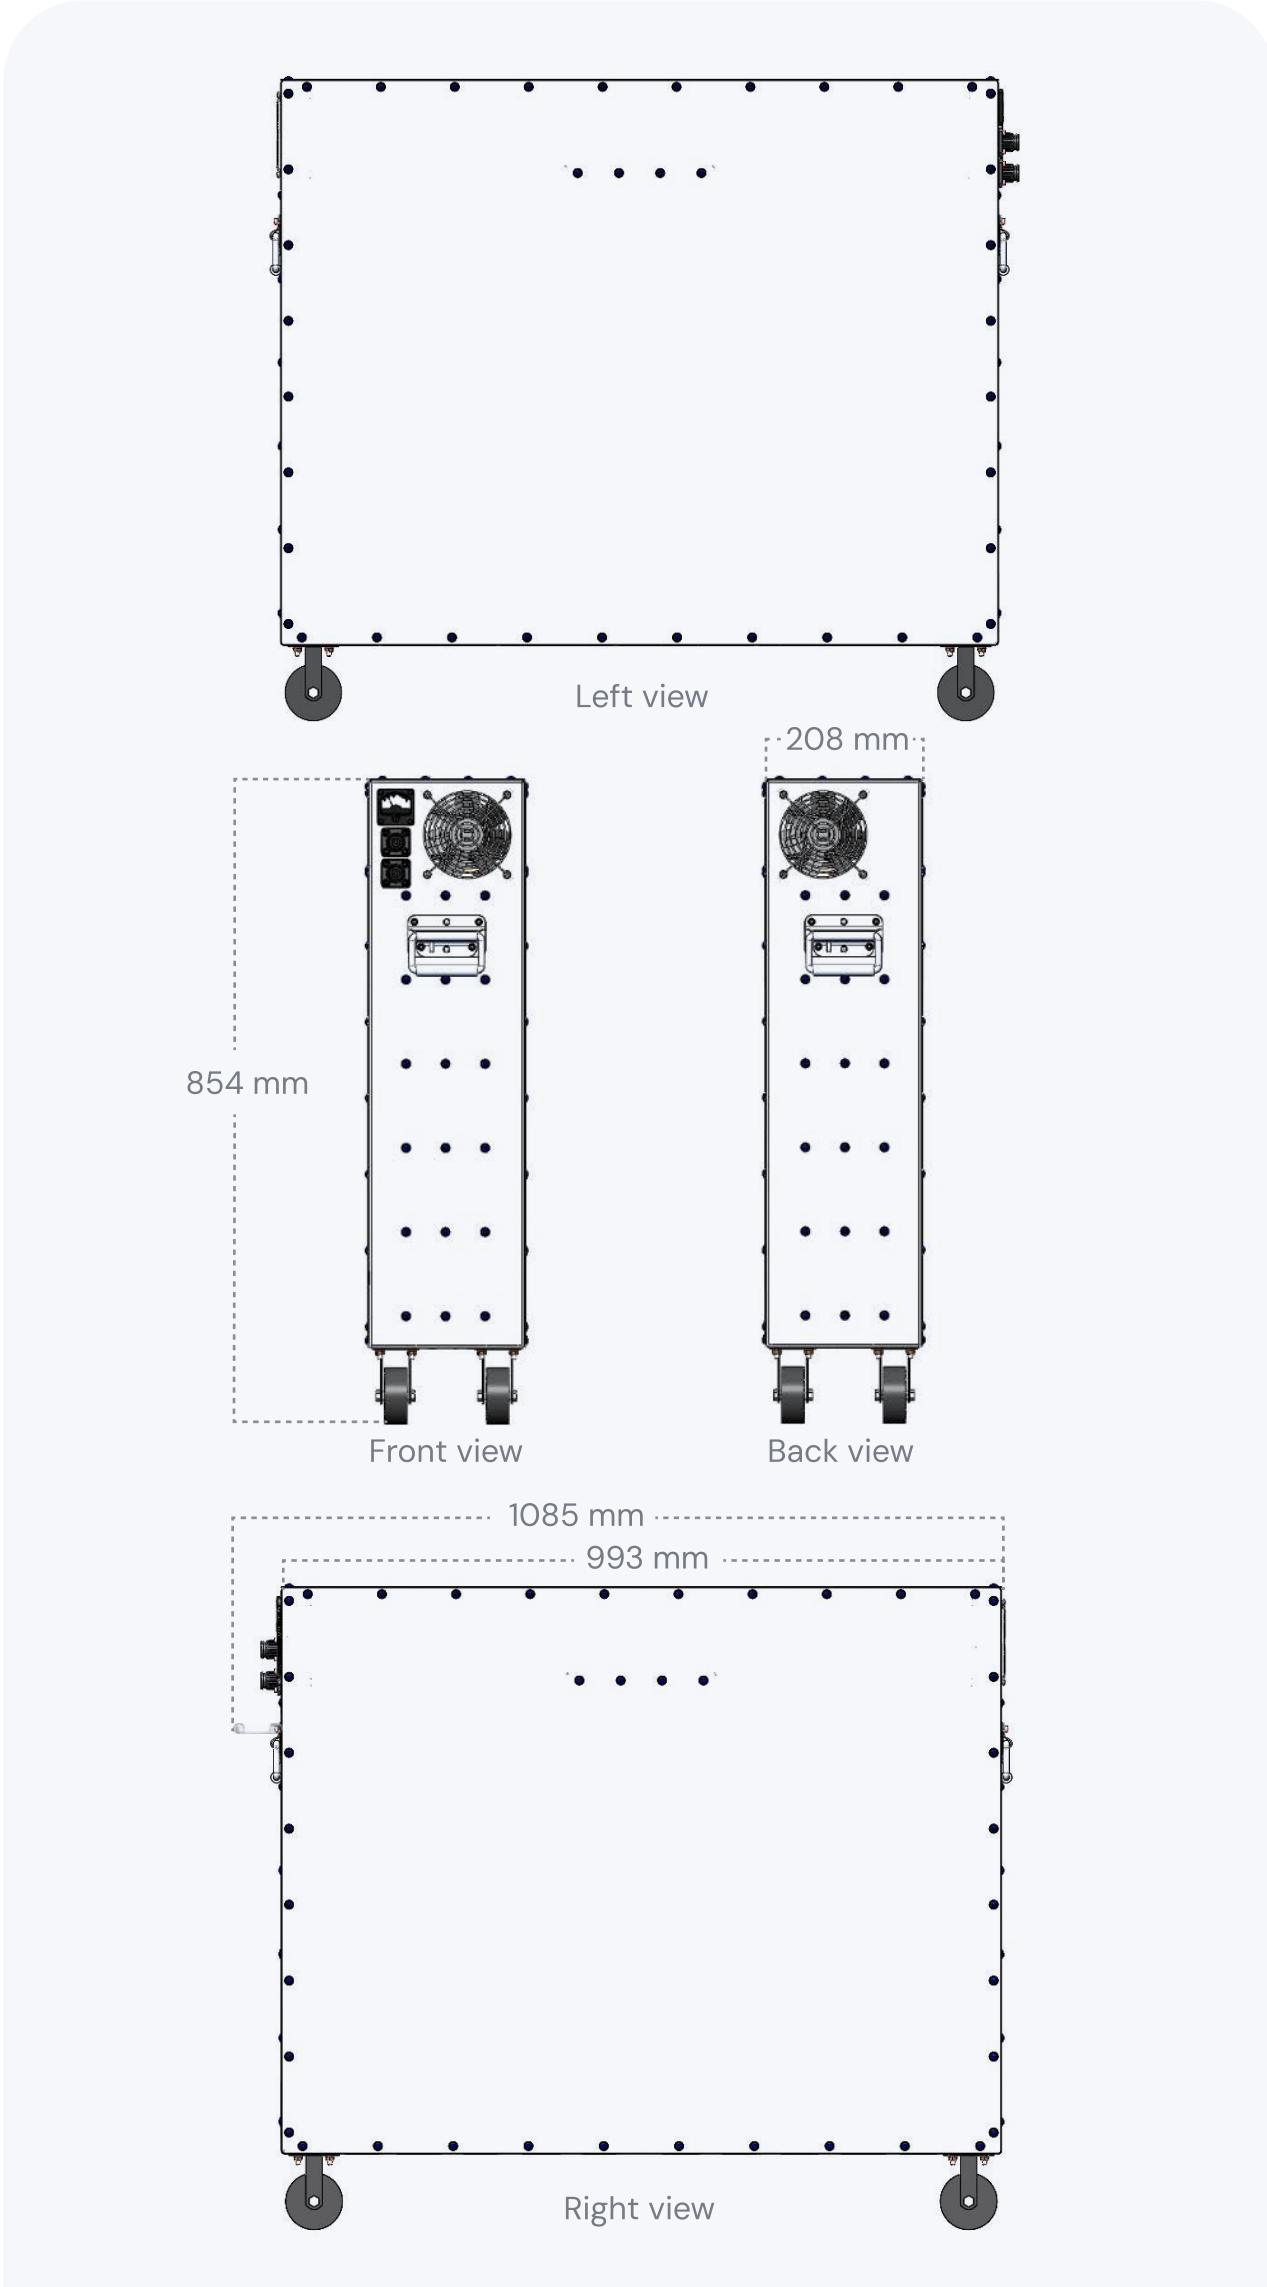

Engineered Safety

Freen-BLL storage solutions are engineered with safety as a top priority.


To mitigate the risk of internal short circuits, fires, and explosions, we implement a strategy of partial capacity utilization, keeping the battery consistently undercharged and underdischarged. This approach significantly reduces the chance of thermal runaway, even under high load conditions.

Our modules are designed to resist mechanical damage that might allow moisture or oxygen to enter the cell, preventing exothermic reactions that could otherwise lead to overheating or ignition.

Contact Us



Freen OÜ

 Arenduse tn 6, Kohtla-Järve,
30328 Ida-Viru maakond,
Estonia

 contact@freen.com

 +372 5374 1754

